

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 917 410 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
19.05.1999 Bulletin 1999/20

(51) Int Cl.⁶: **H05B 33/10, H05B 33/22**

(21) Application number: **98303389.5**

(22) Date of filing: **30.04.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Kim, Sung Tae**
Eunpyung-ku, Seoul (KR)

(74) Representative:
McLeish, Nicholas Alistair Maxwell et al
Boult Wade Tennant
27 Fumival Street
London EC4A 1PQ (GB)

(30) Priority: **18.09.1997 KR 9747579**


(71) Applicant: **LG ELECTRONICS INC.**
Seoul (KR)

(54) **Organic electroluminescent device and method for fabricating the same**

(57) An organic electroluminescent device and a method for fabricating the same are disclosed, the method including the steps of (1) forming a plurality of first electrode stripes (12) on a transparent substrate (11) at fixed intervals, (2) forming an array of partition walls (13) made of an electrically insulating material on the first electrode elements (12); having a trapezoidal structure with the lower side wider than the upper side, (3) forming an organic electroluminescent multilayer (14), the sec-

ond electrode (15), and the first protection layer (16) in succession on the entire surface including on top of the partition walls (13), (4) removing upper portions of films, unequivocally including the second electrode layer (15) on top of the partition walls (13), whereby electrically isolating any two adjacent pixels, and (5) forming the second protection layer (17) on top of the etched-out surface, whereby simplifying fabrication processes, improving product yield and reducing product cost.

FIG.2e

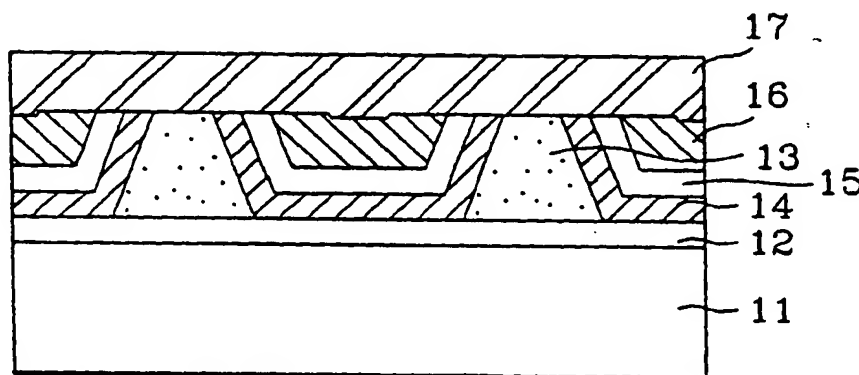

EP 0 917 410 A1

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to a display, and more particularly, to an organic electroluminescent (EL) device and a method for fabricating the same.

Discussion of the Related Art

[0002] Organic EL devices, also called organic light emitting diodes (LEDs), are becoming very popular because of their possible application to flat panel displays (FPDs). They are extremely thin, matrix-addressable and can be operated at a relatively low voltage, typically less than 15 volts. Furthermore, they have additional characteristics suitable for next generation FPDs such as little dependence on viewing angle and good device-formability on flexible substrates among other things. Organic LEDs differ fundamentally from conventional inorganic LEDs. While the charge transfer in inorganics is band-like in nature and the electron-hole recombination results in the interband emission of light, organic films are generally characterized by the low-mobility activated hopping transport and the emission is excitonic. Organic EL devices are also substantially different from conventional inorganic EL devices, especially in that organic EL devices can be operated at low DC voltages.

[0003] A substantial amount of research has been directed toward the efficiency improvement and color control of organic LEDs. The efficiency of some organic EL devices has now been demonstrated to be close to its theoretical limit and certainly adequate for many commercial applications. Moreover, the color control is probably not limiting for many potential applications.

[0004] In light of this, we believe that the outlook for commercial applications is excellent for organic EL devices. Their performance is quite satisfactory for many applications. It is valuable to think in terms of specific products and manufacturing techniques for the commercialization of organic EL devices. Consideration of the specific applications leads us to believe that more work on manufacturability, uniformity, reliability, and systems issues is required to commercialize organic EL devices.

[0005] Pixellation or patterning, especially of electroluminescent and second electrode materials, is one of the key issues to be solved before the commercialization of organic EL devices. The use of many conventional pixellation techniques is precluded due to the nature of organic materials which are extremely vulnerable to the attack by most solvents. Various efforts have been made to utilize shadowing effects for the film patterning. One approach was introduced by C. Tang et al. in U.S. Pat. No. 5,294,870, wherein partition walls were used as a means to give a shadowing effect. Therein each

stripe of the second electrode is supposed to be separated by depositing the second electrode material onto the transparent support with relatively high partition walls at an oblique angle with the surface normal. The idea may be conceivable, but is not suitable at all for mass production. First of all, it is impossible to have a vapor source which may set the direction of traveling metallic vapor at a constant angle with the surface normal over the whole panel surface. Whether one has either a point source or a large area source, the angle would vary with the position of pixel on the transparent support because of the diverging nature of vapor. One may be able to obtain a certain degree of separation with a complicate arrangement of source and support, but only at the sacrifice of production yield. More practical processes have been proposed by K. Nagayama et al. in U.S. Pat. No. 5,701,055 wherein electrically insulating ramparts, like a bunch of tiny umbrellas, serve as a means to shadow the incoming vapor. An advantage of U.S. Pat. No. 5,701,055 over U.S. Pat. No. 5,294,870 is that depositions do not need to be made at an oblique angle, which markedly widens the process window.

[0006] Figs. 1a ~ 1d illustrate typical process steps proposed in U.S. Pat. No. 5,701,055. Referring to Fig. 1a, an array of anode stripes 2 is formed of typically indium tin oxide on a transparent substrate 1, and insulating patterns 3 are formed thereon. As shown in Fig. 1b, next, each of ramparts 4 is formed to fit into the small gap between a pair of the insulating patterns 3. The rampart 4 with a pair of overhangs 8 serves an important role to shadow the incoming vapor. When organic materials and a second electrode material are vapor deposited, the films are formed on top of the ramparts as well as on the surface between the ramparts, as seen in Fig. 1c. The important point is that the films are not formed on the side surface of the ramparts due to a shadowing effect, which ensures the electrical insulation between any two adjacent pixels. After the formation of an electroluminescent multilayer 5 and a second electrode 6 on the first electrode 2 in succession, an encapsulation layer 7 is formed, as in Fig. 1d. In summary, the background art of U.S. Pat. No. 5,701,055 appears to be an effective way to pixellate an organic electroluminescent display panel.

[0007] However, the background art EL device has several drawbacks as follows.

(1) While a variety of ramparts with the different shape is shown in U.S. Pat. No. 5,701,055, the most typical one looks like that shown in Fig. 1b. Since this type of rampart 4 easily causes short-circuits between the first and second electrodes at the edges of the second electrode stripe, it is often necessary to form additional insulating patterns 3. But it is not necessary to fabricate them in the present invention.

(2) Ramparts are often formed of photoresist and the most important parts of them are the overhangs

8 which actually shadow the incoming vapor. It is quite a delicate process to make ramparts with good overhangs. The present invention provides ramparts, or partition walls, the production of which can be much simplified.

(3) Ramparts remain standing on the panel surface even after the completion of the device fabrication. A part of rampart itself or films on top of them may fall down to damage the device locally during the subsequent fabrication processes. To avoid this kind of potential problems, it is recommended to have a stable structure: the shape of trapezoid in the present invention is structurally more stable compared to the inverted trapezoid of the related art.

SUMMARY OF THE INVENTION

[0008] Accordingly, the present invention is directed to an organic electroluminescent device and a method for fabricating the same that addresses one or more of the problems due to the limitations and disadvantages of the related art.

[0009] It would be desirable to provide an organic electroluminescent device and a method for fabricating the same, in which adequate pixellation can be achieved using simple and stable partition walls.

[0010] It would also be desirable if the stable and solid feature of the partition walls employed can make a contribution towards the enhanced long-term stability of the electroluminescent device fabricated thereby.

[0011] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0012] In one aspect, the present invention provides an electroluminescent device including a plurality of pixels each with a first electrode, an organic luminescence multilayer, a second electrode, and successively prepared protection layers. For the purpose of pixellation, the device also has an array of partition walls with a trapezoidal structure made of an electrically insulating material. To achieve the electrical isolation between two adjacent pixels, the panel surface with a multilayer structure is subject to a dry etching process.

[0013] In another aspect, the present invention provides a method for fabricating an electroluminescent device, including the steps of (1) forming a plurality of first electrode strips at fixed intervals on a transparent substrate, (2) forming an array of partition walls with a trapezoidal structure made of an electrically insulating material, (3) laminating an organic electroluminescent multilayer and a second electrode layer in succession on the entire surface including on top of the partition walls,

and (4) subjecting the panel surface to a dry etching process in order to remove a part of the films, especially the second electrode layer formed on top of the partition walls, thereby electrically isolating two adjacent pixels.

[0014] In the drawings:

Figs. 1a ~ 1d illustrate the fabrication steps of an organic electroluminescent device in accordance with a typical embodiment of the background art; and,

Figs. 2a ~ 2e illustrate the fabrication steps of an organic electroluminescent device in accordance with a preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0015] Reference will now be made in detail to the preferred embodiments of the present invention, an example of which is illustrated in the accompanying drawings. Figs. 2a ~ 2e illustrate the fabricating steps of an organic electroluminescent device in accordance with a preferred embodiment of the present invention which has basically a simple XY matrix structure with a plurality of first and second electrode stripes intersecting each other in 90 degree.

[0016] As shown in Fig. 2a, the fabrication processes begin with the formation of a plurality of the first electrode stripes 12 on a transparent substrate 11. Partition walls 13 may be made of either organic or inorganic materials as long as they are electrically insulating: for example, photoresist, silicon oxide, silicon nitride and silicon carbide among other things. After a film for partition walls 13 is coated on the first electrode elements 12, photolithography and etching processes are applied to pattern it as shown in Fig. 2b. Each partition wall 13 is preferably formed to have a trapezoidal structure with the angle θ being below 90° which is more stable and easy to fabricate compared to the background art. A partition wall 13 may be 500nm - 10.000nm high, and preferably 2.000nm high. It may have a width of 100nm ~ 50.000nm though the width is more or less dependent on the display resolution, i.e. the pitch between pixels. Next, the panel may be subjected to a process of vacuum annealing and UV hardening, especially, if the partition walls 13 are made of organic materials such as photoresist, whereby the partition walls are hardened and residual solvents are removed as completely as possible. Each rampart of the background art typically has a pair of overhangs which are often more fragile and susceptible to heat than other parts. But the partition walls of the present invention are structurally more stable and less susceptible to heat-treatments, which certainly widens the process window. On top of the transparent support with the partition walls 13, next, an organic electroluminescent multilayer 14, the second electrode layer 15 and the first protection layer 16 are

formed in succession, as shown in Fig. 2c. The EL multilayer 14 for green emission typically constitutes of (1) a buffer layer of copper phthalocyanine (CuPc) with a typical thickness of 10nm ~ 20nm, (2) a hole transporting layer of N,N'-diphenyl-N,N'-bis(3-methylphenyl)-(1,1-biphenyl)-4,4'-diamine (TPD) with a thickness of 30nm ~ 50nm, and (3) an emitting layer of tris(8-hydroxy-quinolate)aluminum (Alq₃) co-deposited with a dopant of coumarin 6. The thickness of Alq₃ layer lies in the range of 40nm ~ 60nm and the dopant concentration is roughly 1.0 wt.%. The second electrode 15 is often made of aluminum, Al:Li or Mg:Ag. The first protection layer 16 serves a role to protect the EL elements from moisture and oxygen, and may be made of one or more materials selected from metals, alloys and organics. It is also necessary for the outer surface of the layer 16 to be reasonably well planarized, as seen in Fig. 2c. The planarization of the first protection layer 16 contributes later to keeping unetched the EL multilayer and the second electrode in the emitting zone between a pair of partition walls while etching out those on top of the partition walls. In order to be moisture-resistant as well as planarized, the protection layer 16 may constitute of a multilayer with a moisture absorbing layer, a moisture resistant layer and a planarizing layer, the last of which is preferably formed by spin-coating or Dr. Blade method.

[0017] Fig. 2d shows the step of etching out the upper part of films, unequivocally including the second electrode on top of the partition walls to ensure the electrical isolation between two adjacent pixels. The etching process is preferably carried out using a dry etching method such is reactive ion etching, and the selection of etching gases and etching parameters such as working pressure and plasma power should be carefully made for the balanced removal of involved materials. Finally, as seen in Fig. 2e, the second protection layer 17 is laminated on top of the etched surface to complete the fabrication processes of the present invention. The second protection layer differs from the first protection layer in that the former does not necessarily need a function of planarization.

[0018] The organic electroluminescent device of the present invention and the method for fabricating the same have the following advantages.

[0019] The use of a stable and simple structure for partition walls instead of those with overhangs used in the background art allows easy fabrication and thereby significant improvement in the production yield.

[0020] In addition, the stable and solid feature of the partition walls presumably makes a contribution towards the enhanced long-term stability of the device fabricated thereby.

Claims

1. An electroluminescent device having a plurality of

pixels each with a first electrode stripe, an organic electroluminescent multilayer and a second electrode stripe, the device comprising:

a partition wall of an electrically insulating material projected from each of the first electrode stripes, the partition wall having a trapezoidal structure with the lower side wider than the upper side, wherein portions of the second electrode and possibly the organic luminescence multilayer formed on the partition wall are etched out, thereby any two adjacent pixels being electrically isolated.

2. A device as claimed in claim 1, wherein the partition wall is formed of a material selected from photoresist, silicon nitride and silicon oxide.

3. A device as claimed in claim 1, further comprising the first protective film formed only on each of the emitting pixels and the second protective film formed on the entire surface including on top of the first protective film.

4. A method for fabricating an electroluminescent device, comprising the steps of:

(1) forming a plurality of first electrode stripes at fixed intervals on a transparent substrate;

(2) forming an array of partition walls made of an electrically insulating material on the first electrode elements; having a trapezoidal structure with the lower side wider than the upper side;

(3) forming an organic electroluminescent multilayer, the second electrode layer, and the first protection layer in succession on the entire surface including on top of the partition walls;

(4) removing upper portions of films, unequivocally including the second electrode layer on top of the partition walls, whereby electrically isolating any two adjacent pixels; and

(5) forming the second protection layer on top of the etched-out surface.

5. A method as claimed in claim 4, wherein the first protective coating is formed by a method selected from spin-coating and Dr. Blade method.

6. A method as claimed in claim 4, wherein the partition wall is formed of a material selected from photoresist, silicon nitride and silicon oxide.

FIG.1a
background art

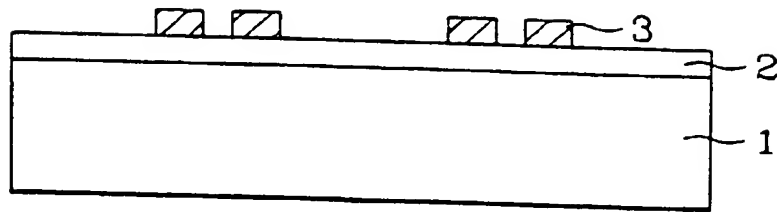


FIG.1b
background art

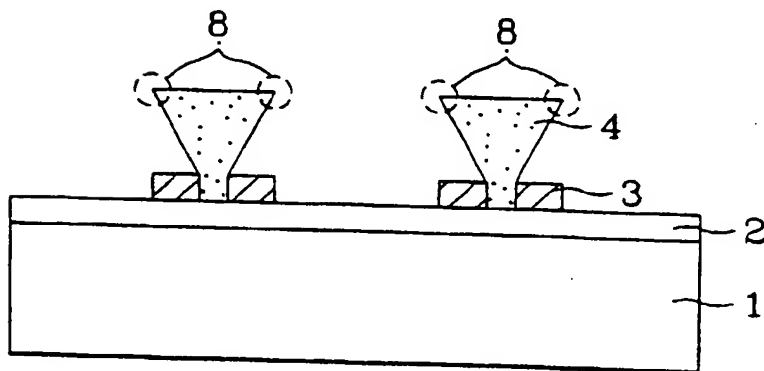


FIG.1c
background art

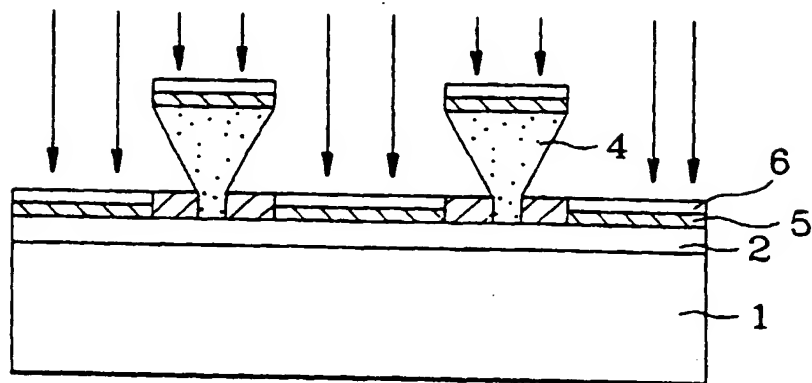


FIG.1d
background art

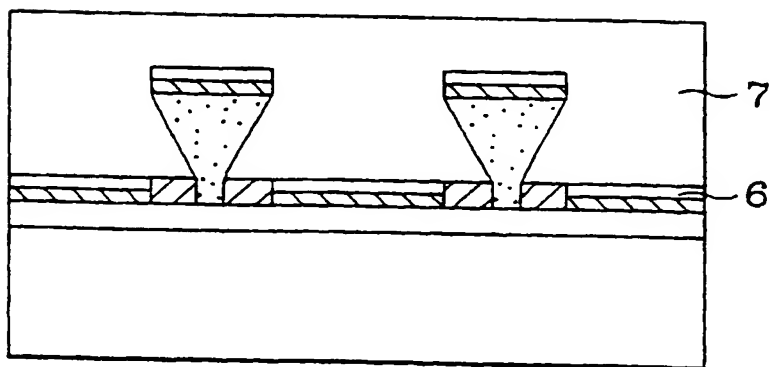


FIG.2a

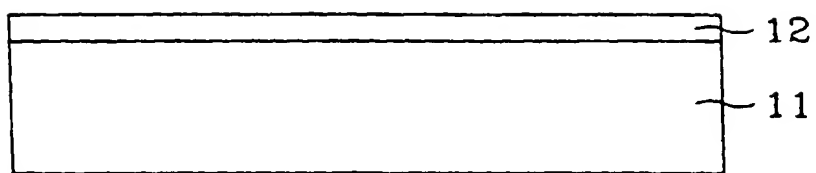


FIG.2b

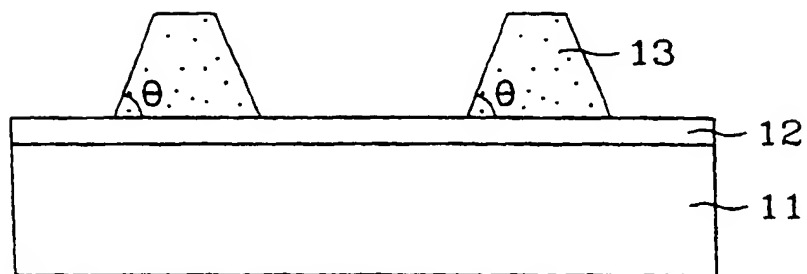


FIG.2c

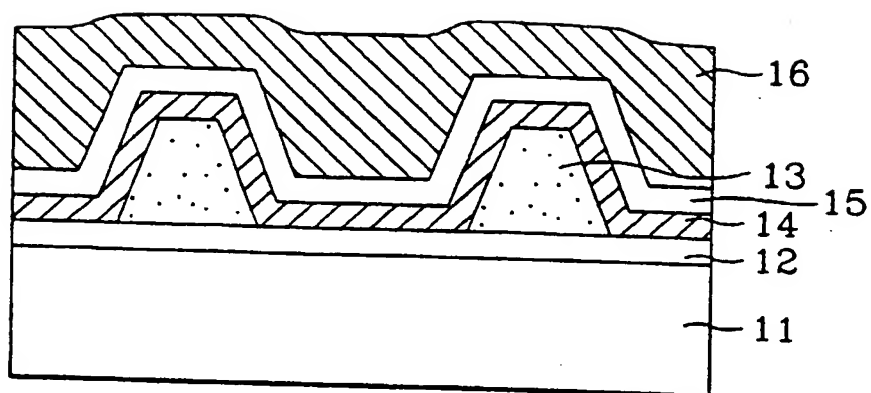


FIG.2d


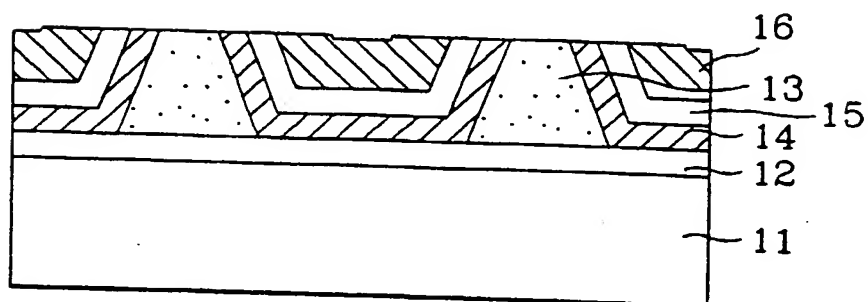


FIG.2e



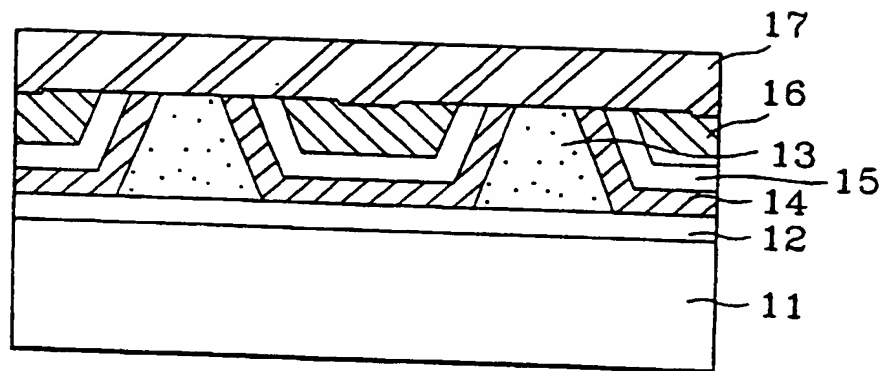

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 3389

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	PATENT ABSTRACTS OF JAPAN vol. 097, no. 001, 31 January 1997 & JP 08 227276 A (PIONEER ELECTRON CORP), 3 September 1996 * abstract *	1-6	H05B33/10 H05B33/22
P, X	& US 5 742 129 A (MIYAGUCHI SATOSHI & AL) 21 April 1998 * the whole document *	1-6	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H05B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 3 December 1998	Examiner Drouot, M-C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1500 03/82 (Pd-C01)